HOME
RESOURCE

HOME RESOURCE
36th anniversary

Commercial Lighting Product Guide

Home Resource Ind. Co., Ltd.

www.homeresource.com.tw

BSCI
DBID: 18865

ISO 9001

Taipei Headquarter:
4F, No. 7, Dexing W. Rd., Shilin Dist., Taipei City , Taiwan
Tel: 886-2 2809 1212 (Rep. 21 Lines)
E-mail: hr@homeresource.com.tw
Zhongshan Home Resource Factory:
No.8, Yanjiang W. 1st Rd., Keji Ave., Torch Development Zone, Zhongshan City, Guangdong, China
http://www.homeresource.com.tw

WHO

WE ARE

Home Resource has 36 years in exterior & interior lights market,We are uniquely positioned to offer the right solutions and value for your LED lighting requirements with our holistic approach and vertically integrated infrastructure.







Taipei



Zhongshan



Ningbo

OUR

HISTORY TIMELINE

- 2021 **Winner of the iF Design Award, Germany**
- 2017 Received The Best Innovation Award of Taiwan Lighting Association
- 2015 Received National Excellent Lighting Quality Award in Japan
- 2013 Awarded the BSCI certification
- 2010 Established New Factory in Zhongshan (Guangdong)
  Established the Research & Development Center
- 2008 **Red Dot Design Award, Germany**
  Good Design Product, Taiwan
- 2007 Awarded as one of the best "ISO 9001:2000" companies listed as members of KEMA organization
- 2006 Acquired 26,000 square meters land in Zhongshan City, Guangdong
- 2005 Received National Quality Award in Taiwan
- 2004 President Sam Chen was being the Chairman of Taiwan Lighting Association (2004-2007)
- 2003 Awarded from TUVPS as one of the TOP 5 Golden Clients in Asia
  Founded the scholarships in Longung Elementary School in Taichung City, Taiwan
- 1999 Established Home Resource in Qinxi, Dongguan (Guangdong)
  Awarded the ISO 9001:2000 certification
- 1998 Established Charitable Memorial Foundation of caring for the elderly
- 1997 Established Home Resource Golf Team
- 1996 Received Excellent Quality Award, Spain
- 1995 HR being the 1st Taiwanese company in receipt of SEMKO, NEMKO, and DEMKO Certificates
- 1992 Established Home Resource in Shanghai/Ningbo
- 1988 Established Home Resource Ind. Co., Ltd. in Taiwan

ECO ROUND STRINGER
R7

NEW




Anti-impact | IP65 | Recycle | Injection molding cord, strong tensile strength | Smaller size only 1/3 of conventional luminaire


Long Life 10 years OK | 120VAC 60Hz | CRI ≥80 | Omni OK | IP65 | 3 years warranty | LED PHILIPS 2835 | LM80 | ETL | FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-R7-5-X	AC 120V	65W	120LM/W	7800LM	>80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	1KV
BWSTL-R7-10-X	AC 120V	130W	120LM/W	15600LM	>80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	1KV

DIMENSIONS

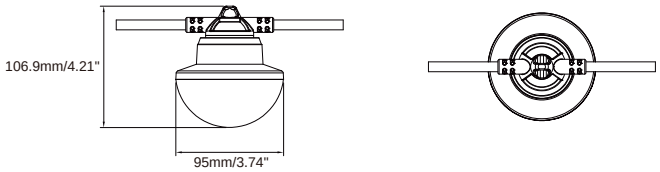



LINKABLE UNITS

BWSTL-R7-5
5 lamps one set



80W Maximum link 5 sets(18 AWG), 8 sets(16 AWG)

BWSTL-R7-10
10 lamps one set




160W Maximum link 3 sets(18 AWG), 4 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)


FEATURES

NO.1

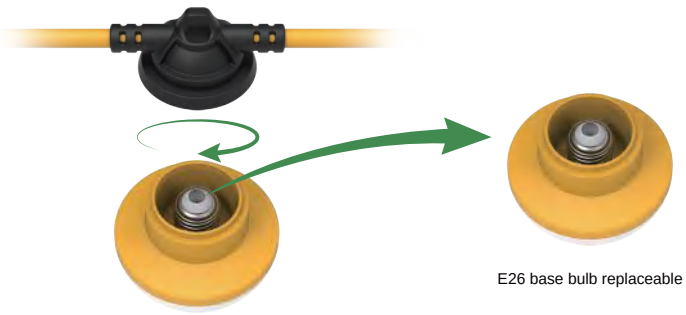


E26 base bulb replaceable

NO.2

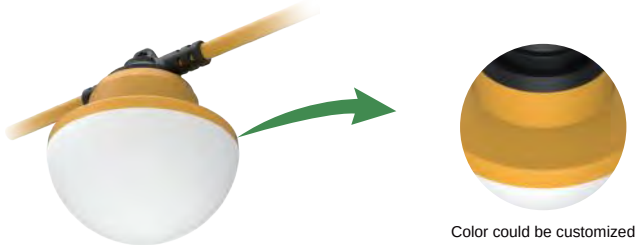


Color could be customized

NO.3

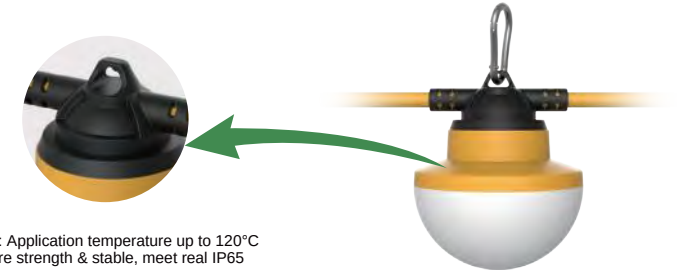

PC: Application temperature up to 120°C
More strength & stable, meet real IP65

NO.4

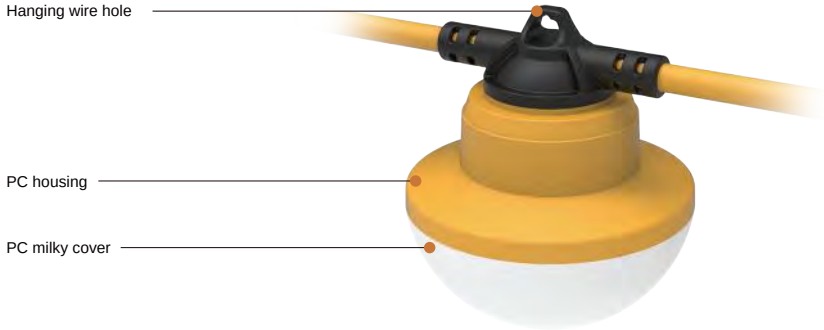

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
50	21*21*18	43.6*43.6*20	0.436	0.436	0.2	0.038	4	2900	7128
100	42*21*18	43.6*43.6*20	0.436	0.436	0.2	0.038	2	1450	3564

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-R7-X-X

BW	STL	R7	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R7	5=5 lamps 10=10 lamps	Any number Word or Phrase

PRO ROUND STRINGER
R6



Anti-impact

IP65

Recycle

Injection molding cord, strong tensile strength

Smaller si only 1/3 of conventior luminaire

Long Life 10 years OK

120VAC 60Hz

CRI ≥80

OK

IP65

5 years warranty


LED PHILIPS 2835

LM80

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-R6-5-D	AC 120V	80W	125LM/W	10000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	1KV
BWSTL-R6-10-D	AC 120V	160W	125LM/W	20000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	1KV

DIMENSIONS

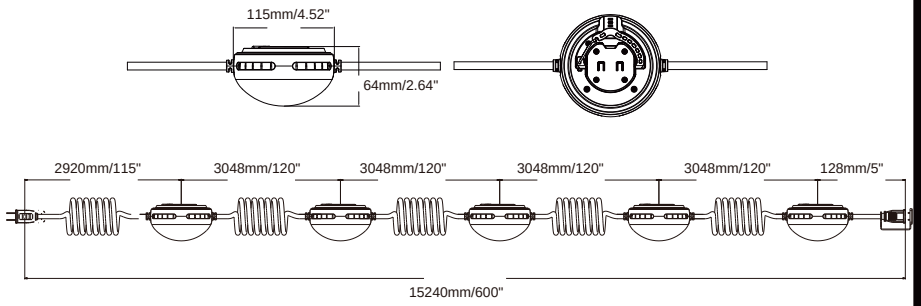

LINKABLE UNITS

BWSTL-R6-5
5 lamps one set



80W Maximum link 5 sets(18 AWG), 8 sets(16 AWG)

BWSTL-R6-10
10 lamps one set



160W Maximum link 3 sets(18 AWG), 4 sets(16 AWG)

LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES

Foldable Hanging Hook
· Easy installation
· Save packing, save freight cost
· Protect the hook during transportation


NO.1



PC Housing


PC Milky Cover

NO.2

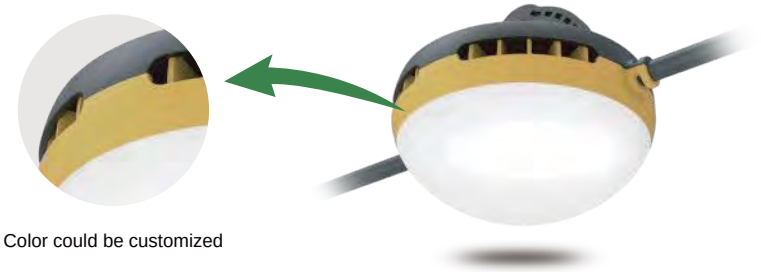

Color could be customized

NO.3

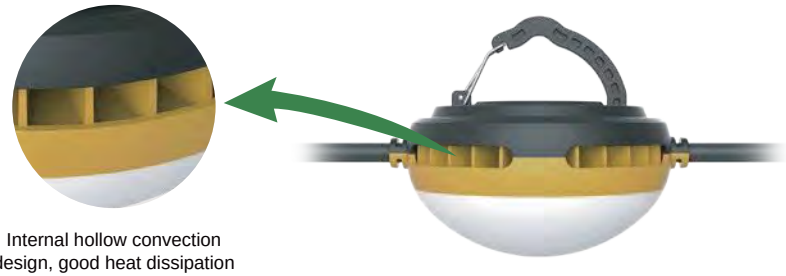

Internal hollow convection design, good heat dissipation

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
80	22*22*19	45.5*45.5*21	0.46	0.46	0.21	0.043	4	2416	5976
160	44*22*19	45.5*45.5*21	0.46	0.46	0.21	0.043	2	1194	2988

APPLICATIONS










CATALOG NUMBER BREAKDOWN

BWSTL-R6-X-X

BW	STL	R6	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R6	5=5 lamps 10=10 lamps	Any number Word or Phrase

ECO ROUND STRINGER
R5

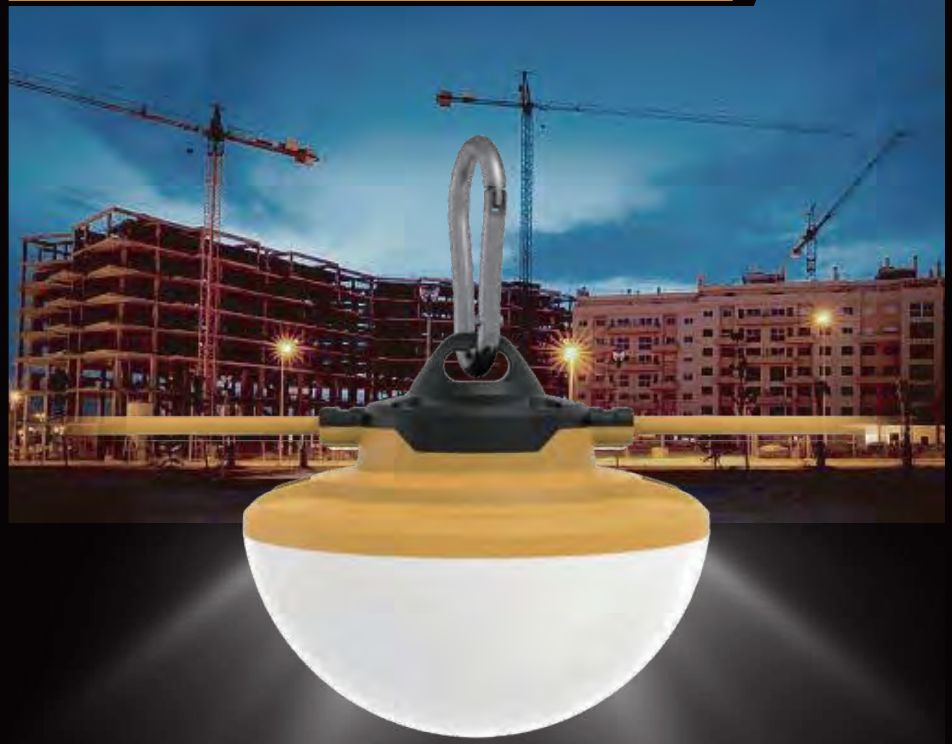


Anti-impact | IP65 | Recycle | Injection molding cord, strong tensile strength | Smaller si… only 1/3 of… conventio… luminaire


Long Life 10 years OK | 120VAC 60Hz | CRI ≥80 | Omni OK | IP65 | 5 years warranty | LED PHILIPS 2835 | LM80 | ETL | FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-R5-5-D	AC 120V	50W	120LM/W	6000LM	80	IP65	SPT-2W 18/2 AWG	50ft	1KV
BWSTL-R5-10-D	AC 120V	100W	120LM/W	12000LM	80	IP65	SPT-2W 18/2 AWG	100ft	1KV

DIMENSIONS



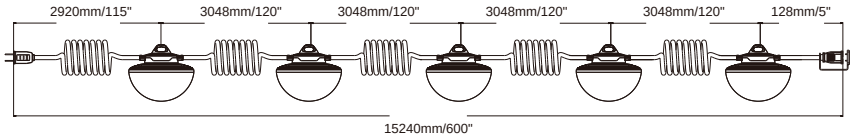

LINKABLE UNITS

BWSTL-R5-5
5 lamps one set



50W Maximum link 8 sets(18 AWG)

BWSTL-R5-10
10 lamps one set




100W Maximum link 4 sets(18 AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES



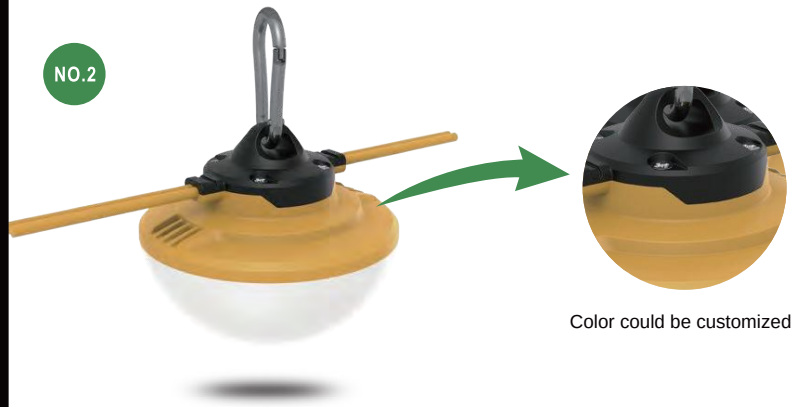

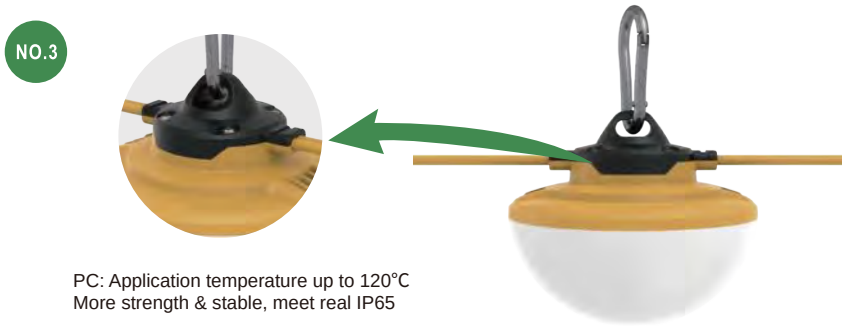

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
50	21*21*18	43.6*43.6*20	0.436	0.436	0.2	0.038	4	2900	7128
100	42*21*18	43.6*43.6*20	0.436	0.436	0.2	0.038	2	1450	3564

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-R5-X-X

BW	STL	R5	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R5	5=5 lamps 10=10 lamps	Any number Word or Phrase

ROUND STRINGER
R4



Anti-impact

IP65

Recycle

Injection molding cord, strong tensile strength

Smaller si
only 1/3 of
conventior
luminaire

Long Life 10 years OK

120VAC 60Hz

CRI ≥80

OK

IP65

5 years warranty


LED PHILIPS 2835


LM80

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-R4-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	1KV
BWSTL-R4-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	1KV

DIMENSIONS

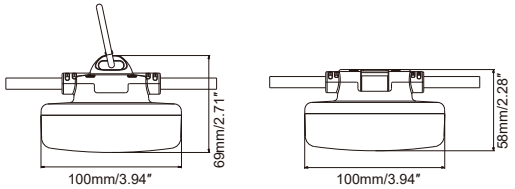

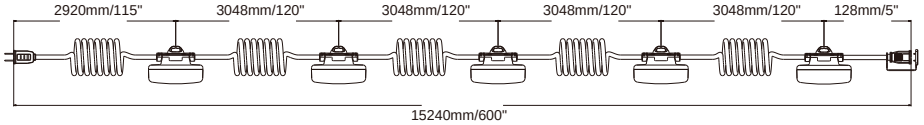


LINKABLE UNITS

BWSTL-R4-5
5 lamps one set



65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)

BWSTL-R4-10
10 lamps one set

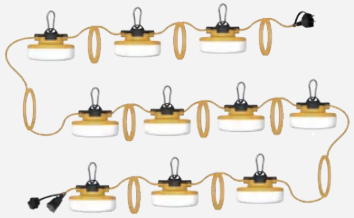


130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES



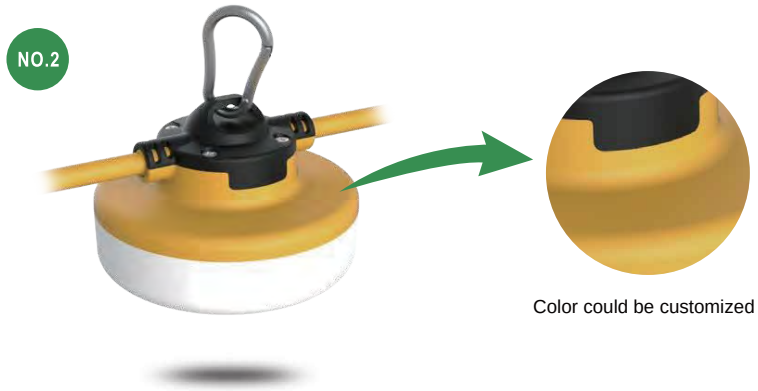

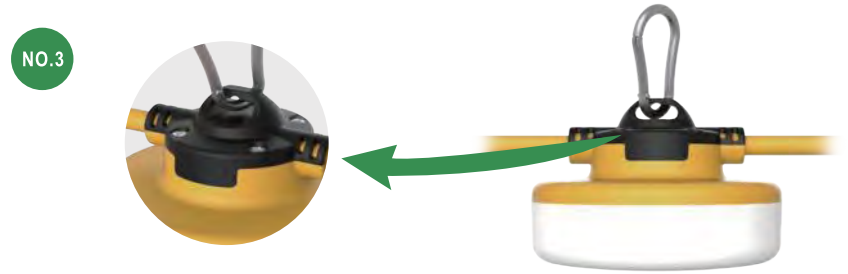

PC: Application temperature up to 120℃
More strength & stable, meet real IP65

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	22*22*19	45.5*45.5*21	0.455	0.455	0.21	0.043	4	2416	5976
130	44*22*19	45.5*45.5*21	0.455	0.455	0.21	0.043	2	1194	2988

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-R4-X-X

BW	STL	R4	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R4	5=5 lamps 10=10 lamps	Any number Word or Phrase

ROUND STRINGER
R3



Anti-impact

IP65

Recycle

Injection molding cord, strong tensile strength

Smaller si
only 1/3 of
conventior
luminaire

Long Life 10 years OK

120VAC 60Hz

CRI ≥80

OK

IP65

5 years warranty


LED PHILIPS 2835


LM80

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-R3-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	1KV
BWSTL-R3-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	1KV

DIMENSIONS



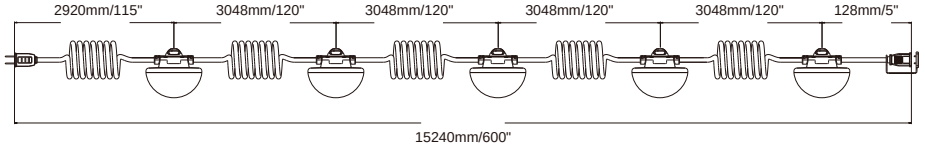

LINKABLE UNITS

BWSTL-R3-5
5 lamps one set



65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)

BWSTL-R3-10
10 lamps one set



130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES




NO.2

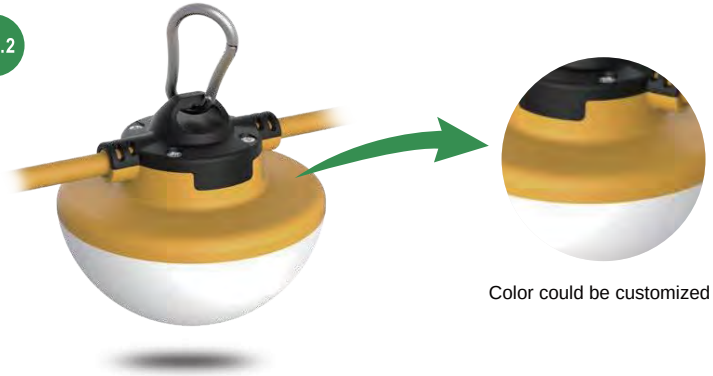

Color could be customized

NO.3

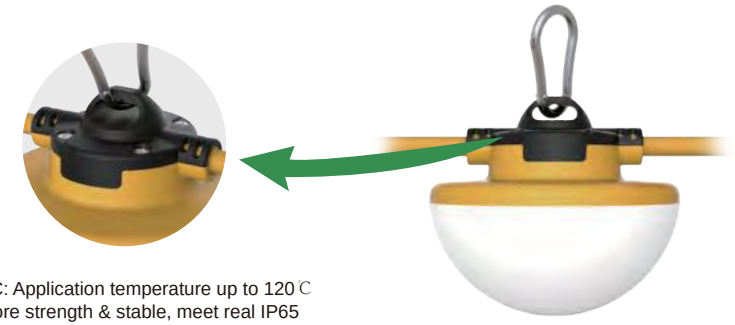

PC: Application temperature up to 120℃
More strength & stable, meet real IP65

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	25*21*19	51.5*43.5*21	0.515	0.435	0.21	0.047	4	2420	5520
130	42*25*19	51.5*43.5*21	0.515	0.435	0.21	0.047	2	1210	2760

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-R3-X-X

BW	STL	R3	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R3	5=5 lamps 10=10 lamps	Any number Word or Phrase

ROUND STRINGER
R2




Anti-impact | IP65 | Recycle | Injection molding cord, strong tensile strength | Smaller si… only 1/3 of… conventio… luminaire


Long Life 10 years OK | 120VAC 60Hz | CRI ≥80 | OK | IP65 | 5 years warranty | LED PHILIPS 2835 | LM80 | ETL | FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	PLASTIC COVERS	SPD
BWSTL-R2-5-D	AC 120V	65W	125LM/W	8000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	50ft	Optional	1KV
BWSTL-R2-10-D	AC 120V	130W	125LM/W	16000LM	80	NO	IP65	SJTW 18/2 AWG SJTW 18/3 AWG SJTW 16/2 AWG SJTW 16/3 AWG	100ft	Optional	1KV

DIMENSIONS

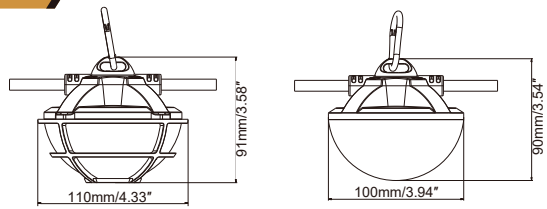

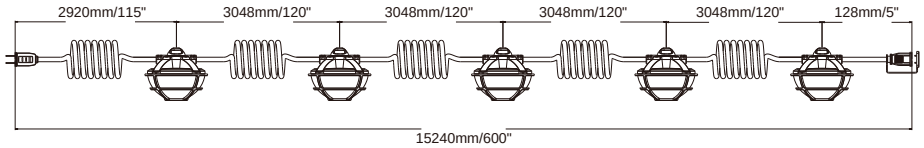

LINKABLE UNITS

BWSTL-R2-5
5 lamps one set



65W Maximum link 6 sets(18 AWG), 10 sets(16 AWG)

BWSTL-R2-10
10 lamps one set




130W Maximum link 3 sets(18 AWG), 5 sets(16 AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES

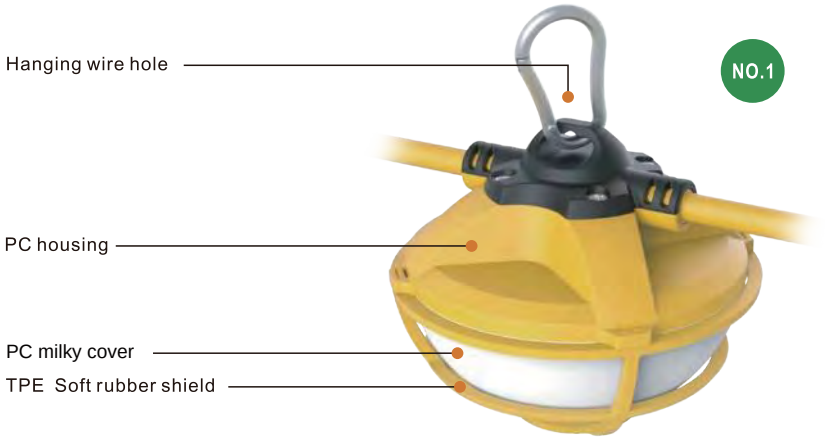


NO.2

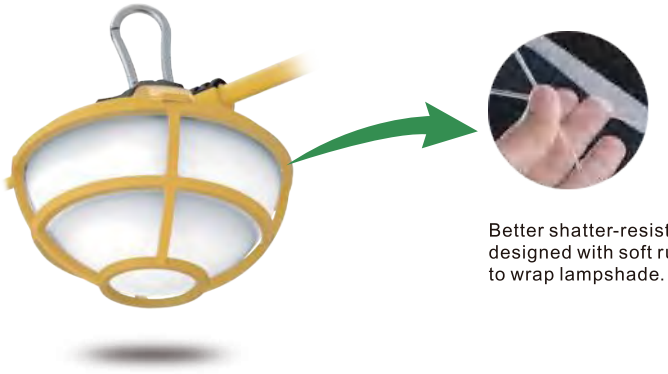

Better shatter-resistant, designed with soft rubber to wrap lampshade.

NO.3

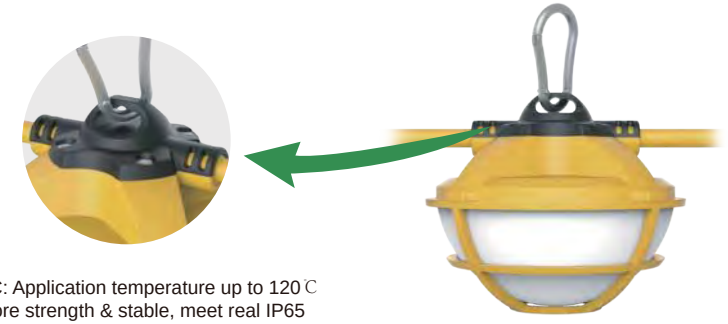

PC: Application temperature up to 120℃
More strength & stable, meet real IP65

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
65	25*21*19	51.5*43.5*21	0.515	0.435	0.21	0.047	4	2420	5520
130	42*25*19	51.5*43.5*21	0.515	0.435	0.21	0.047	2	1210	2760

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-R2-X-X

BW	STL	R2	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	R2	5=5 lamps 10=10 lamps	Any number Word or Phrase

SQUARE STRINGER
F3

NEW




Anti-impact | IP65 | Recycle | Injection molding cord, strong tensile strength | Smaller size only 1/2 of conventional luminaire


Long Life 10 years OK | 120VAC 60Hz | CRI ≥80 | IP65 | 5 years warranty | LED PHILIPS 2835 | LM80 | ETL | FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	WATER PROOF	WIRE SIZE	LENGTH	SPD
BWSTL-F3-5-D	AC 120V	125W	112LM/W	14000LM	80	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	50ft	1KV
BWSTL-F3-10-D	AC 120V	250W	112LM/W	28000LM	80	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	100ft	1KV


DIMENSIONS






LINKABLE UNITS

BWSTL-F3-5
5 lamps one set

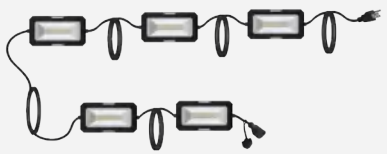

125W Maximum Link 4 sets(18AWG),6 sets(16AWG)

BWSTL-F3-10
10 lamps one set

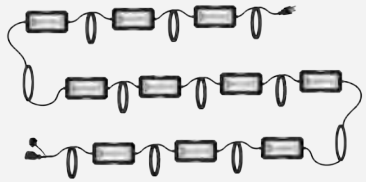

250W Maximum Link 2 sets(18AWG),3 sets(16AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

STRUCTURES

Die-cast silver gray glossy finish.


PC high light transmittance transparent mask.

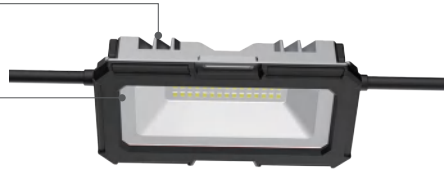

Die-cast black matte finish.


PVC black matte finish.

PC reflective cup white matte.

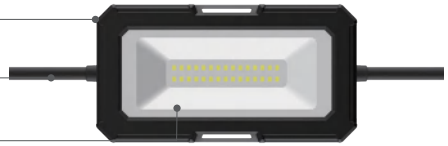

FEATURES

Good heat dissipation, higher power and higher light efficiency.

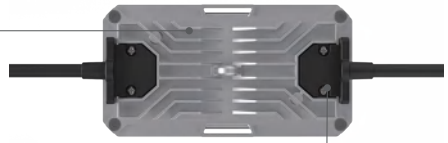


The external wiring is made with a one-piece molding, and the internal wiring entry of the light body has a reserved glue groove to achieve an upgraded waterproof feature.

Optimized waterproof


The mask screws are hidden at the back, making the front appearance more aesthetically pleasing without visible screws.



Reserved with auxiliary hook holes to ensure that the light body remains level when wall-mounted.




Two types of cable ties.

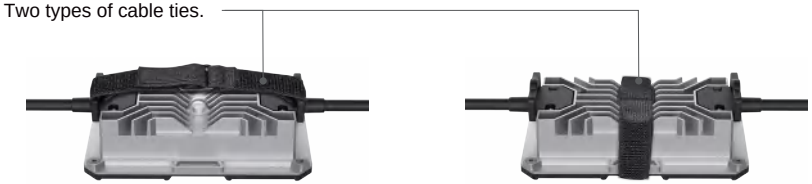

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
125	37.2*27*11.5	39*29*26	0.39	0.29	0.26	0.030	4	3732	4531
250	37.2*27*23.0	39*29*52	0.39	0.29	0.52	0.059	2	948	2304

APPLICATIONS

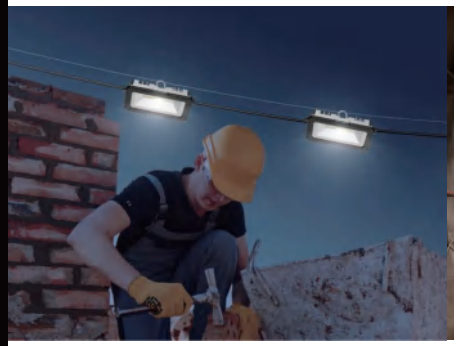



CATALOG NUMBER BREAKDOWN

BWSTL-F3-X-X

BW	STL	F3	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	F3	5=5 lamps 10=10 lamps	Any number Word or Phrase

SQUARE STRINGER
F1 F2





Anti-impact

IP65

Recycle

Injection molding cord, strong tensile strength

Smaller size only 1/2 of conventional luminaire

Long Life 10 years OK

120VAC 60Hz

CRI ≥80

IP65

5 years warranty

LED PHILIPS 2835

LM80


ETL


FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	LUMEN EFFICACY	LM@5000K ±5%	CRI	DIMMABLE	WATER PROOF	WIRE SIZE	LENGTH	PLASTIC COVERS	SPD
BWSTL-F1-5-D	AC 120V	100W	125LM/W	12500LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	50ft	Optional	1KV
BWSTL-F1-10-D	AC 120V	200W	125LM/W	25000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	100ft	Optional	1KV
BWSTL-F2-5-D	AC 120V	125W	125LM/W	16000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	50ft	Optional	1KV
BWSTL-F2-10-D	AC 120V	250W	125LM/W	32000LM	80	NO	IP65	SJTW 18/3 AWG SJTW 16/3 AWG	100ft	Optional	1KV

DIMENSIONS

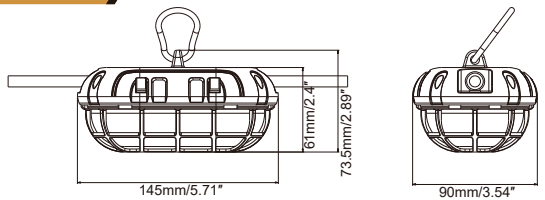




LINKABLE UNITS

BWSTL-F1-5 BWSTL-F2-5
5 lamps one set



100W Maximum link 4 sets(18 AWG), 7 sets(16 AWG)
125W Maximum link 3 sets(18 AWG), 6 sets(16 AWG)

BWSTL-F1-10 BWSTL-F2-10
10 lamps one set




200W Maximum link 2 sets(18 AWG), 4 sets(16 AWG)
250W Maximum link 2 sets(18 AWG), 3 sets(16 AWG)


LENGTH

5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

FEATURES

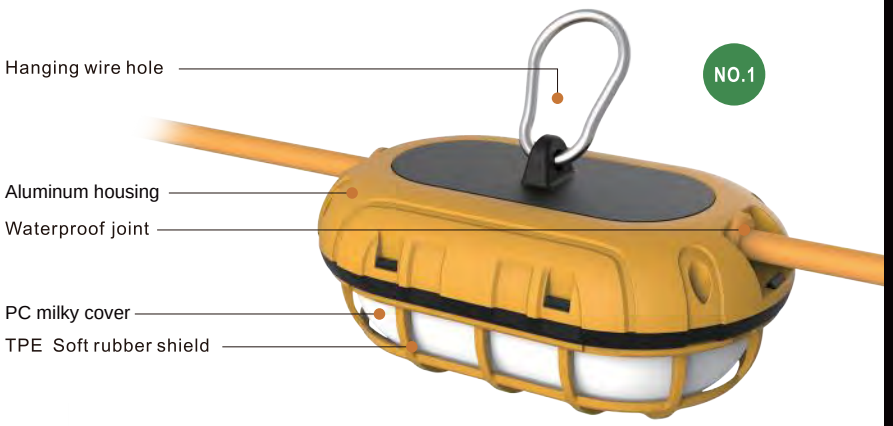


NO.2

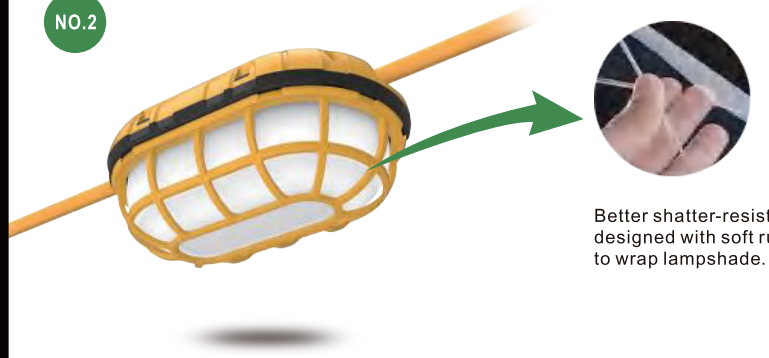

Better shatter-resistant, designed with soft rubber to wrap lampshade.

NO.3





1. Highly sealed waterproof joints to ensure waterproof and safe cable wiring.
2. High toughness clamping jaws, designed with a wide range of clamping cables, effective tensile strength, strong waterproof and dustproof

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	L	W	H	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
100/125	23*23*27	47.6*47.6*29	0.476	0.476	0.29	0.066	4	1572	4000
200/250	46*23*27	47.6*47.6*29	0.476	0.476	0.29	0.066	2	786	2000

APPLICATIONS









CATALOG NUMBER BREAKDOWN

BWSTL-F1-X-X

BW	STL	F1	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	F1=F1 F2=F2	5=5 lamps 10=10 lamps	Any number Word or Phrase

CLASSIC STRINGER
C1



Anti-impact

Recycle

Injection molding cord, strong tensile strength

SPECIFICATIONS

ITEM #	INPUT VOLT.	LAMP HOLDER	LAMP TYPE/ INCLUDED	WIRE SIZE	MAX. WATT FOR THE WHOLE CHAIN	LENGTH	PLASTIC CAGES
BWSTL-C1-5	AC 120V	Medium Base	150W max Type A / Not Included	SJTW 14/2 AWG SJTW 12/2 AWG	14/2 AWG - 1260W 12/2 AWG - 1620W	50ft	Included
BWSTL-C1-10	AC 120V	Medium Base	150W max Type A / Not Included	SJTW 14/2 AWG SJTW 12/2 AWG	14/2 AWG - 1260W 12/2 AWG - 1620W	100ft	Included

LINKABLE UNITS

BWSTL-C1-5
5 lamps one set




BWSTL-C1-10
10 lamps one set



5 lamps one set (Standard)	L=50ft (15m)	10 lamps one set (Standard)	L=100ft (30m)
15 lamps one set	L=150ft (46m)	20 lamps one set	L=200ft (61m)
25 lamps one set	L=250ft (76m)	30 lamps one set	L=300ft (91m)

APPLICATIONS



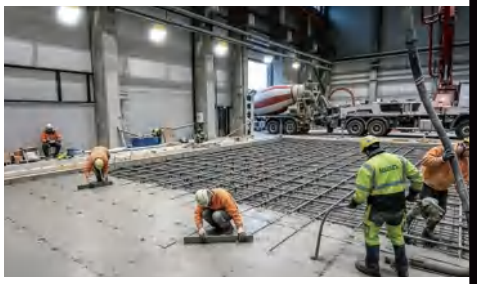

CATALOG NUMBER BREAKDOWN

BWSTL-C1-X-X

BW	STL	C1	X	X
Company Name	Product Info	Series	Lamp Qty	
Bestwon	String Light	C1	5=5 lamps 10=10 lamps	Any number Word or Phrase

DOB HIGHBAY PORTABLE WORKLIGHT
W6

NEW




Long Life 10 years OK | 120VAC 60Hz | CRI ≥80 | Omni OK | 3 years warranty | LED PHILIPS 2835 | LM80 | cULus LISTED | FC


SPECIFICATIONS

ITEM#	INPUT VOLT.	WATT	CCT	CRI	LUMEN EFFICACY	LUMEN	CORD	WORKING TEMP	IP	SPD
W6-10-X	AC 120V	100W	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	>80	115LM/W	11500LM	SJTW 16/3 AWG SJTW 18/3 AWG Input cable 5ft+Output cable 1ft Input cable 9ft+Output cable 1ft	(-40°C~45°C) (-40°F~113°F)	IP65	2KV
W6-15-X	AC 120V	150W	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	>80	115LM/W	17250LM	SJTW 16/3 AWG SJTW 18/3 AWG Input cable 5ft+Output cable 1ft Input cable 9ft+Output cable 1ft	(-40°C~45°C) (-40°F~113°F)	IP65	2KV

DIMENSIONS



W6-100W



W6-150W

LINKABLE UNITS

Customer can choose to connect several work lights in series or not. Suitable to damp location. The length of the PVC connector can be customized.



Watt	Max. link-able Qtys		Max. link-able length	
	18AWG	16AWG	18AWG	16AWG
100W	5pcs	7pcs	9m/30ft	12.8m/42ft
150W	4pcs	5pcs	7.3m/24ft	9m/30ft

FEATURES

NO.1

FOLDABLE HOOK

- Save packing, save freight cost
- Protect the hook during transportation.



NO.2

SUPERB HEAT DISSIPATION


Convective air outlet channels



Convective air outlet channels

NO.3

CONTROL THE ON/OFF INDEPENDENTLY




On/ Off
Button Option

NO.4


STACKABLE DESIGN

The radian of the top cover is consistent with the lamp base and it can be stacked



NO.5

BRACKET MOUNTING HOLES ARE RESERVED FOR SELF-INSTALLATION

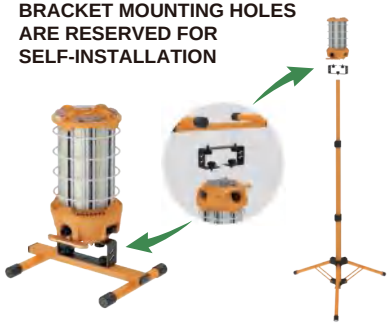

NO.6

COLOR CAN BE CUSTOMIZED



PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
100	17.8*17.8*30	37*37*22	0.044	4	2360	5900
150	17.8*17.8*34	37*37*26	0.049	4	2080	5200

APPLICATIONS









CATALOG NUMBER BREAKDOWN

W6-10-X

W6	10	X
Series	Wattage	CCT
Work Light G6	10=100W 15=150W	27=2700K 30=3000K 35=3500K 45=4500K 40=4000K 50=5000K 57=5700K

PORTABLE HIGH BAY WORKLIGHT
W3




Long Life 10 years OK | 120VAC 60Hz | PF ≥0.9 | CRI ≥80 | Omni OK | 5 years warranty | LED PHILIPS 2835 | LM80 | cULus LISTED | FC

SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	CHIPS	CCT	LUMEN EFFICACY @5000K ±5%	LM@5000K ±5%	PF	CRI	CORD & PLUG	STAINLESS STEEL GUARD	WORKING TEMP	WARRANTY	SPD
W3-6-X	AC 120V	60W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	130lm/W 150lm/W	7800LM/ 9000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years	6KV
W3-10-X	AC 120V	100W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	130lm/W 150lm/W	13000LM/ 15000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years	6KV
W3-15-X	AC 120V	150W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	130lm/W 150lm/W	19500LM/ 22500LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years	6KV
W3-20-X	AC 120V	200W	Lumileds 2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	130lm/W 150lm/W	26000LM/ 30000LM	>0.9	>80	SJTW 16/3 or 18/3 AWG 10ft cord+plug	Yes	(-40°C~45°C) (-40°F~113°F)	5 years	6KV

DIMENSIONS

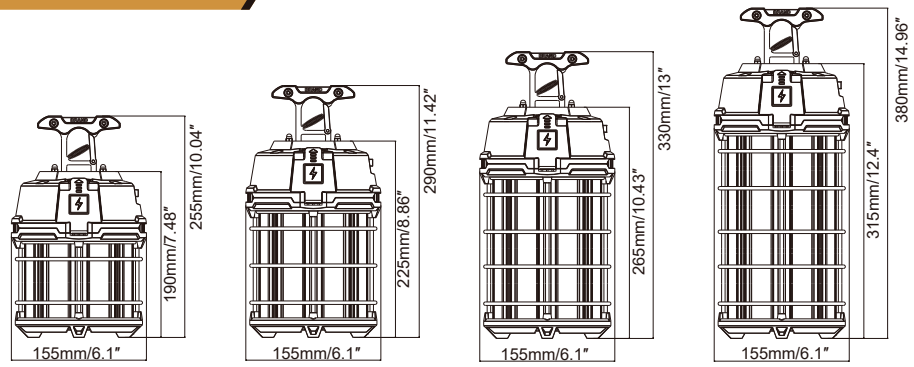

W3-60W | W3-100W | W3-150W | W3-200W

LINKABLE UNITS

Hidden & built-in connector design. Customer can choose to connect several work lights in series or not. Suitable to damp location. The length of the PVC connector can be customized.



Wattage	Max.linkable Qtys(120V)		Max.Linkable Length(120V)	
	18/3AWG	16/3AWG	18/3AWG	16/3AWG
60W	12 PCS	16 PCS	36M/118.11ft	48M/157.48ft
100W	7 PCS	10 PCS	21M/68.89ft	30M/98.42ft
150W	5 PCS	7 PCS	15M/49.21ft	21M/68.89ft
200W	4 PCS	5 PCS	12M/39.37ft	15M/49.21ft

FEATURES

NO.1


FOLDABLE HOOK

1. Save packing, save freight cost
2. Protect the hook during transportation




NO.2

SUPERB HEAT DISSIPATION



NO.3

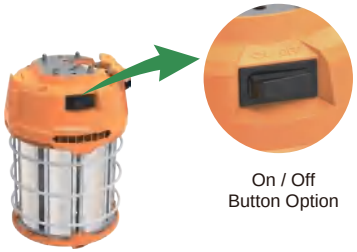

On / Off
Button Option

NO.4

STACKABLE DESIGN

The radian of the top cover is consistent with the base and can be stacked



NO.5

BRACKET MOUNTING HOLES ARE RESERVED FOR SELF-INSTALLATION



NO.6



Color Can be Customized

PACKING INFO

Watt	Inner Box/CM	Master Ctn/CM	CBM/Ctn	Pcs/Ctn	20GP Qty	40HQ Qty
60	17.8*17.8*26.5	37*37*28.5	0.039	4	2660	6660
100	17.8*17.8*30	37*37*32	0.044	4	2360	5900
150	17.8*17.8*34	37*37*36	0.049	4	2080	5200
200	17.8*17.8*39	37*37*41	0.056	4	1856	4640

APPLICATIONS









CATALOG NUMBER BREAKDOWN

W3-6-X

W3	6	X
Series	Wattage	CCT
Work Light G3	6=60W 10=100W 15=150W 20=200W	27=2700K 30=3000K 35=3500K 45=4500K 40=4000K 50=5000K 57=5700K

LED PREFAB HIGH BAY WORK LIGHT
W5




Long Life 10 years OK | 120VAC 60Hz | PF ≥0.9 | CRI ≥80 | Omni OK | 5 years warranty | LED PHILIPS 2835 | LM80 | ETL | FC


SPECIFICATIONS

ITEM #	INPUT VOLT.	WATT	CHIPS	CCT	LM@5000K ±5%	PF	CRI	STAINLESS STEEL GUARD	WORKING TEMP
W5-6-X	AC120-277V 50/60Hz	60W	2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	7800LM	>0.9	>80	Yes	(-40°C~45°C) (-40°F~113°F)
W5-10-X	AC120-277V 50/60Hz	100W	2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	13000LM	>0.9	>80	Yes	(-40°C~45°C) (-40°F~113°F)
W5-15-X	AC120-277V 50/60Hz	150W	2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	19500LM	>0.9	>80	Yes	(-40°C~45°C) (-40°F~113°F)
W5-20-X	AC120-277V 50/60Hz	200W	2835	2700K/ 3000K/ 4000K/ 5000K/ 5700K/ 6000K/ 6500K	26000LM	>0.9	>80	Yes	(-40°C~45°C) (-40°F~113°F)


DIMENSIONS




W5-60W



W5-100W



W5-150W



W5-200W

CATALOG NUMBER BREAKDOWN


W5-6-X

W5	6	X
Series	Wattage	CCT
Work Light G5	6=60W 10=100W 15=150W 20=200W	27=2700K 30=3000K 35=3500K 45=4500K 40=4000K 50=5000K 57=5700K

FEATURES


NO.1

ADD CUSTOMIZED WIRING

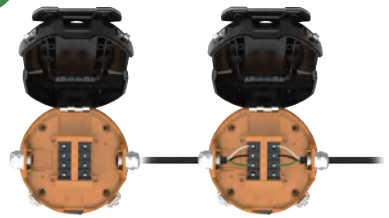

NO.2

LOCKING LATCHES - TOOL FREE

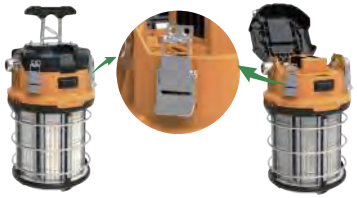

NO.3

FOLDABLE HOOK

1. Save packing, save freight cost
2. Protect the hook during transportation



SUPERB HEAT DISSIPATION

NO.4



Convective air outlet channels


NO.5



BRIGHTNESS: 50%-100%-OFF

NO.6

STACKABLE DESIGN
The radian of the top cover is consistent with the base and can be stacked



NO.7

Bracket mounting holes are reserved for self-installation



NO.8



Color Can be Customized

LINKABLE UNITS



Wattage	Max. Link-able Qtys (120V)			
	18/2 18/3AWG	16/2 16/3AWG	14/2 14/3AWG	12/2 12/3AWG
60W	13PCS	16PCS	20PCS	24PCS
100W	8PCS	10PCS	12PCS	14PCS
150W	6PCS	7PCS	8PCS	10PCS
200W	4PCS	5PCS	6PCS	7PCS

Wattage	Max. Link-able Length (120V)			
	18/2 18/3AWG	16/2 16/3AWG	14/2 14/3AWG	12/2 12/3AWG
60W	39M/130FT	48M/160FT	60M/200FT	72M/240FT
100W	24M/80FT	30M/100FT	36M/120FT	42M/140FT
150W	18M/60FT	21M/70FT	24M/80FT	30M/100FT
200W	12M/40FT	15M/50FT	18M/60FT	21M/70FT

Wattage	Max. Link-able Qtys (277V)			
	18/2 18/3AWG	16/2 16/3AWG	14/2 14/3AWG	12/2 12/3AWG
60W	26PCS	32PCS	40PCS	48PCS
100W	16PCS	20PCS	24PCS	28PCS
150W	12PCS	14PCS	16PCS	20PCS
200W	8PCS	10PCS	12PCS	14PCS

Wattage	Max. Link-able Length (277V)			
	18/2 18/3AWG	16/2 16/3AWG	14/2 14/3AWG	12/2 12/3AWG
60W	78M/260FT	96M/320FT	120M/400FT	144M/480FT
100W	48M/160FT	60M/200FT	72M/240FT	84M/280FT
150W	36M/120FT	42M/140FT	48M/160FT	60M/200FT
200W	24M/80FT	30M/100FT	36M/120FT	42M/140FT

APPLICATIONS









SITE TWIN HEAD TRIPOD
TR1

NEW



120VAC 60Hz | CRI ≥80 | Omni OK | IP65 | 2 years warranty | LM80 | ETL | FC

SPECIFICATIONS

INPUT VOLTAGE	AC120V 60Hz	
WATTAGE	60W(30W*2)	100W(50W*2)
	200W(100W*2)	300W(150W*2)
LUMINAIRE SIZE	160*120*30mm/6.30*4.72*1.18 inch (30W)	190*145*30mm/7.48*5.71*1.18 inch (50W)
	270*198*40mm/10.63 *7.80*1.57 inch(100W)	270*198*40mm/10.63 *7.80×*1.57 inch(150W)
LUMEN OUTPUT	7200lm	12000lm
	24000lm	36000lm
WIRE SPECIFICATION	SJTW 18/3 AWG	
PLUG TYPE	US standard plug	
CCT	5000K	
TRIPOD SIZE	L800mm(2.6inch)*W800mm(2.6inch)*H1600mm(5.2 inch)/H2000mm(6.5 inch)	
MAXIMUM EXTENSION HEIGHT	1.6m(5.2 inch) or 2m(6.5 inch)	
LAMP BODY MATERIAL	Die-cast aluminum+glass	
CABLE LENGTH	3.4M(11.1 inch)	
BEAM ANGLE	120°	
CRI	>80	
IP/IK RATING	IP65/IK07	
CABLE MATERIAL	PVC	
WARRANTY	2 years	
WORKING TEMPERATURE	-40℃-45℃(-40℉-113℉)	

FEATURES

NO.1



Glass Cover



On/Off Switch

Aluminum heat sink




The frame is made of Aluminum

NO.2



Buckle fixing (Easy to install)


NO.3

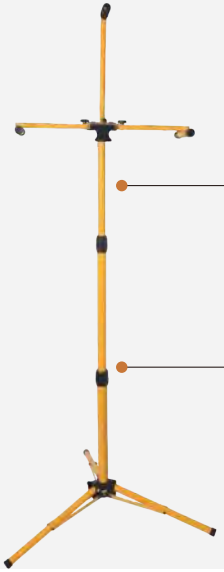

Cast iron

3-step tripod stand

NO.4

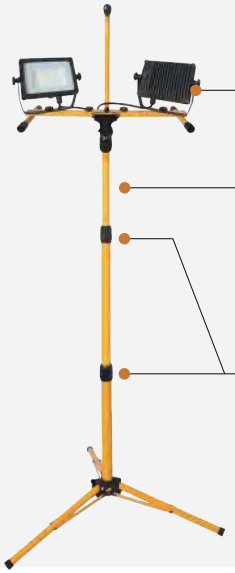


Adjustable lamp head angle

Pole color can be customized

Height Adjustable

APPLICATIONS

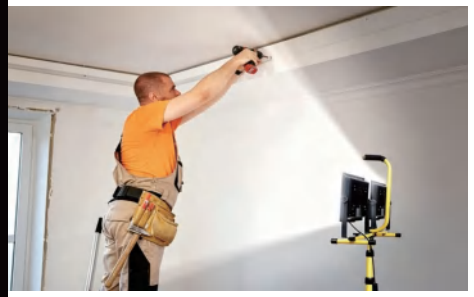







SITE TWIN HEAD TRIPOD
TR2

NEW



120VAC 60Hz | CRI ≥80 | Omni | IP65 | 2 years warranty | LM80 | ETL | FC

SPECIFICATIONS

INPUT VOLTAGE	AC120V 60Hz	
WATTAGE	60W(30W*2)	100W(50W*2)
	200W(100W*2)	300W(150W*2)
LUMINAIRE SIZE	160*155*30mm/6.30*6.10*1.18 inch (30W)	195*185*35mm/7.68*7.28*1.38 inch (50W)
	250*235*35mm/9.84 *9.25*1.38 inch(100W)	290*275*40mm/11.42 *10.83×*1.57inch(150W)
LUMEN OUTPUT	6000lm	10000lm
	20000lm	30000lm
WIRE SPECIFICATION	SJTW 18/3 AWG	
PLUG TYPE	US standard plug	
CCT	5000K	
TRIPOD SIZE	L800mm(2.6inch)*W800mm(2.6inch)*H1600mm(5.2 inch)/H2000mm(6.5 inch)	
MAXIMUM EXTENSION HEIGHT	1.6m(5.2 inch) or 2m(6.5 inch)	
LAMP BODY MATERIAL	Die-cast aluminum+glass+pc	
CABLE LENGTH	3.4M(11.1 inch)	
BEAM ANGLE	120°	
CRI	>80	
IP/IK RATING	IP65/IK07	
CABLE MATERIAL	PVC	
WARRANTY	2 years	
WORKING TEMPERATURE	-40℃-45℃(-40℉-113℉)	

FEATURES

NO.1



Glass Cover

On/Off Switch



Aluminum heat sink




The frame is made of PC

NO.2



Screw fixing (Stronger)


NO.3

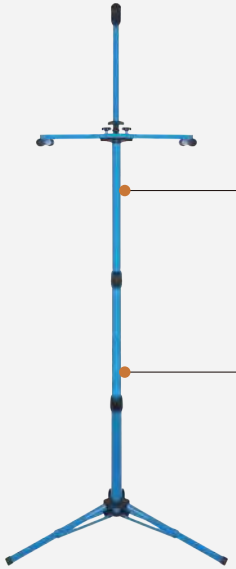

Cast iron

3-step tripod stand

NO.4

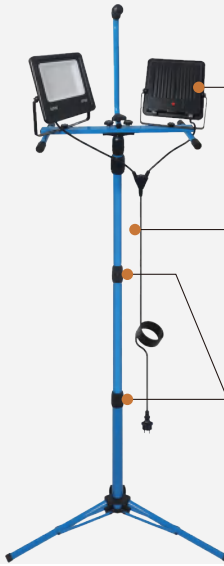

Adjustable lamp head angle

Pole color can be customized

Height Adjustable

APPLICATIONS









HIGH VOLTAGE STRIP WORKLIGHT

NEW



HIGH LUMENS | CUTTABLE | IP RATING | Years warranty

REGULAR TYPE

ITEM NO	BW-HVSP-SMD-ID-8-XXXXX	BW-HVSP-SMD-ID-12-XXXXX	BW-HVSP-SMD-ID-15-XXXXX	BW-HVSP-SMD-OD-8-XXXXX	BW-HVSP-SMD-OD-12-XXXXX	BW-HVSP-SMD-OD-15-XXXXX
CHIP	SMD			SMD		
VOLTAGE(V)	AC120V 60HZ			AC120V 60HZ		
POWER(W/m)	8W	12W	15W	8W	12W	15W
DRIVER	Internal driver			External driver		
CCT	5000K (Customize supported)			5000K (Customize supported)		
CRI	≥80			≥80		
LUMENS(lm/m)	800lm (960lm option)	1200lm (1440lm option)	1500lm (1800lm option)	800lm (960lm option)	1200lm (1440lm option)	1500lm (1800lm option)
LIGHT EFFICACY (lm/W)@5000K	100lm/w (120lm/w option)	100lm/w (120lm/w option)	100lm/w (120lm/w option)	100lm/w (120lm/w option)	100lm/w (120lm/w option)	100lm/w (120lm/w option)
SDCM	≤7	≤7	≤7	≤7	≤7	≤7
BEAM ANGLE	120°			120°		
MATERIAL	PVC standard; Silicone supported			PVC standard; Silicone supported		
LUMINOUS SIDE	Single-sided illumination			Single-sided illumination		
INSTALLATION	3M type/Snap/Extrusion			3M type/Snap/Extrusion		
OPERATING TEMP	PVC standard: -20℃~45℃(-4°F-113°F) Silicone: -40℃~45℃(-40°F-113°F)			PVC standard: -20℃~45℃(-4°F-113°F) Silicone: -40℃~45℃(-40°F-113°F)		
IP & IK	IP65/IK07			IP65/IK07		
PACKAGE	Reel/ Hand-cranked reel/ Self-retracting reel(optional)+ Outer box			Reel/ Hand-cranked reel/ Self-retracting reel(optional)+ Outer box		
LIFE SPAN	20000H			20000H		
LENGTH PER ROLL	50M/Reel			50M/Reel		

COB TYPE / DOUBLE-SIDED LIGHTING TYPE

ITEM NO	BW-HVSP-COB-ID-8-XXXXX	BW-HVSP-COB-ID-12-XXXXX	BW-HVSP-COB-ID-15-XXXXX
CHIP	COB		
VOLTAGE(V)	AC120V 60HZ		
POWER(W/m)	8W	12W	15W
DRIVER	Internal driver		
CCT	5000K (Customize supported)		
CRI	≥80		
LUMENS(lm/m)	640lm	960lm	1200lm
LIGHT EFFICACY (lm/W)@5000K	80lm/w	80lm/w	80lm/w
SDCM	≤7	≤7	≤7
BEAM ANGLE	120°		
MATERIAL	PVC standard; Silicone supported		
LUMINOUS SIDE	Single-sided illumination		
INSTALLATION	3M type/Snap/Extrusion		
OPERATING TEMP	PVC standard: -20℃~45℃(-4°F-113°F) Silicone: -40℃~45℃(-40°F-113°F)		
IP & IK	IP65/IK07		
PACKAGE	Reel/ Hand-cranked reel/ Self-retracting reel（optional）+ Outer box		
LIFE SPAN	20000H		
LENGTH PER ROLL	50M/Reel		

ITEM NO	BW-HVSP-SMD-OD-10-DU-XXXXX	BW-HVSP-SMD-OD-16-DU-XXXXX
CHIP	SMD	
VOLTAGE(V)	AC120V 60HZ	
POWER(W/m)	10W	16W
DRIVER	External driver	
CCT	5000K (Customize supported)	
CRI	≥80	
LUMENS(lm/m)	900lm	1440lm
LIGHT EFFICACY (lm/W)@5000K	90lm/w	90lm/w
SDCM	≤7	≤7
BEAM ANGLE	360°	
MATERIAL	PVC standard; Silicone supported	
LUMINOUS SIDE	Double-sided illumination	
INSTALLATION	3M type/Snap/Extrusion	
OPERATING TEMP	PVC standard: -20℃~45℃(-4°F-113°F) Silicone: -40℃~45℃(-40°F-113°F)	
IP & IK	IP65/IK07	
PACKAGE	Reel/ Hand-cranked reel/ Self-retracting reel（optional）+ Outer box	
LIFE SPAN	20000H	
LENGTH PER ROLL	50M/Reel	

ACCESSORIES

Accessories(High Voltage No Wire)


Cable Connector


I Connector


T Connector


L Connector


Internal Driver


External Driver


Extrusion


Screws


PVC Channel


Clip

INSTALLATION


Method 1：Snap + Screws


Method 2：Extrusion + Screws



Method 3：3M tape

APPLICATIONS





CATALOG NUMBER BREAKDOWN

BW-HVSP-COB/SMD-X-X-X-XXXXX

BW	HVSP	COB/SMD	-X	-X	-X	-XXXXX
COMPANY NAME	Product Info	Chip Type	Driver	Wattage	luminous side	
BSW	High Voltage Strip light	COB OR SMD	ID: Internal driver OD: External driver	8:8W 12:12W 15:15W	Blank: Single-sided illumination DU: Double-sided illumination	Any number word or phrase

RGBW LED JELLY JAR WORKLIGHT

NEW




Long Life 10 years OK | 120-277Vac 50/60Hz | PF ≥0.9 | CRI ≥80 | Omni OK | 5 years warranty | LM80 | c UL us LISTED

SPECIFICATIONS

ITEM#	WATTAGE	LEDTYPE	COLOR	CRI	R9	LUMEN OUTPUT	INPUT VOLTAGE	INPUT FREQUENCY	INPUT CURRENT	PF	SPD	BEAM ANGLE	IP	WORKING TEMP
BWRGBWJJ-25W-XXX	25-20-15W Selectable	SMD 5050	R/G/B/W (5000K)	>80	>0	R:570lm(Max) G:620lm(Max) B:600lm(Max) W:2750lm(Max)	AC120-277V	50/60Hz	0.25A	0.9	6KV	360°	IP65	-40~45°C (-40~113°F)

DIMENSIONS

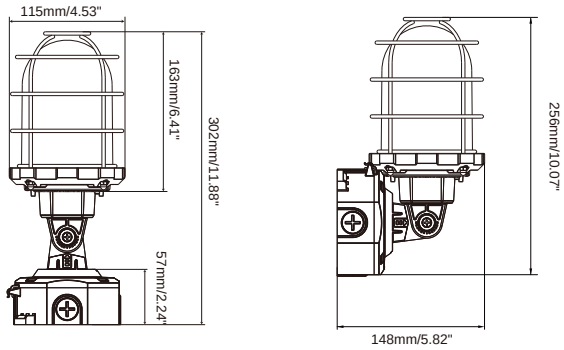

APPLICATIONS





CATALOG NUMBER BREAKDOWN

BWRGBWJJ-25W-XXX

BW	RGBW JJ	25W	X	X	X
Company Name	Series	Wattage	Color	Photosensor	
Bestwon Lighting	RGBW Jelly Jar	25-20-15W Selectable	RGB=R/G/B/W(5000K) Selectable	P=With Photosensor Blank=Without Photosensor	Any number Word or Phrase

LED JELLY JAR WORKLIGHT




Long Life 10 years OK | 120-277Vac 50/60Hz | PF ≥0.9 | CRI ≥80 | Omni OK | 5 years warranty | LM80 | cULus LISTED | FC | ETL

SPECIFICATIONS

ITEM #	WATT	LED TYPE	CCT	CRI	R9	LUMEN EFFICACY	LUMEN OUTPUT	INPUT VOLTAGE	INPUT FREQUENCY	INPUT CURRENT	PF	SPD	BEAM ANGLE	IP	WORKING TEMP
BWJJ-20W-XXX	20-16-12W	SMD 2835	3000-4000-5000K tunable	>80	>0	125lm/W	2500-2000-1500LM	AC120-277V	50/60Hz	0.2A	>0.9	4KV	360°	IP65	-40~45°C (-40~113°F)

DIMENSIONS

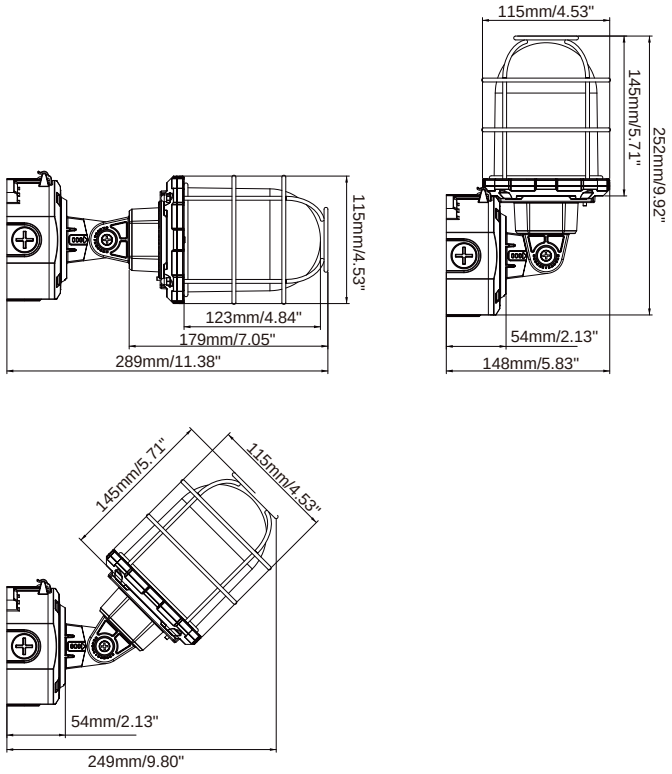

COB TYPE / DOUBLE-SIDED LIGHTING TYPE

ITEM NO	BW-HVSP-COB-ID-8-XXXXX	BW-HVSP-COB-ID-12-XXXXX	BW-HVSP-COB-ID-15-XXXXX
CHIP	COB		
VOLTAGE(V)	AC230V 50HZ Standard OR AC 110V 50HZ		
POWER(W/m)	8W	12W	15W
DRIVER	Internal driver		
CCT	5000K (Customize supported)		
CRI	≥80		
LUMENS(lm/m)	640lm	960lm	1200lm
LIGHT EFFICACY (lm/W)@5000K	80lm/w	80lm/w	80lm/w
SDCM	≤7	≤7	≤7
BEAM ANGLE	120°		
MATERIAL	PVC standard; Silicone supported		
LUMINOUS SIDE	Single-sided illumination		
INSTALLATION	3M type/Snap/Extrusion		
OPERATING TEMP	PVC standard: -20℃~45℃ Silicone: -40℃~45℃		
IP & IK	IP65/IK07		
PACKAGE	Reel/ Hand-cranked reel/ Self-retracting reel（optional）+ Outer box		
LIFE SPAN	20000H		
LENGTH PER ROLL	50M/Reel		

ITEM NO	BW-HVSP-SMD-OD-10-DU-XXXXX	BW-HVSP-SMD-OD-16-DU-XXXXX
CHIP	SMD	
VOLTAGE(V)	AC230V 50HZ Standard OR AC 110V 50HZ	
POWER(W/m)	10W	16W
DRIVER	External driver	
CCT	5000K (Customize supported)	
CRI	≥80	
LUMENS(lm/m)	900lm	1440lm
LIGHT EFFICACY (lm/W)@5000K	90lm/w	90lm/w
SDCM	≤7	≤7
BEAM ANGLE	360°	
MATERIAL	PVC standard; Silicone supported	
LUMINOUS SIDE	Double-sided illumination	
INSTALLATION	3M type/Snap/Extrusion	
OPERATING TEMP	PVC standard: -20℃~45℃ Silicone: -40℃~45℃	
IP & IK	IP65/IK07	
PACKAGE	Reel/ Hand-cranked reel/ Self-retracting reel（optional）+ Outer box	
LIFE SPAN	20000H	
LENGTH PER ROLL	50M/Reel	

ACCESSORIES

Accessories(High Voltage No Wire)


Cable Connector


I Connector


T Connector


L Connector


Internal Driver


External Driver


Extrusion


Screws


PVC Channel


Clip

INSTALLATION


Method 1：Snap + Screws


Method 2：Extrusion + Screws



Method 3：3M tape

APPLICATIONS






CATALOG NUMBER BREAKDOWN

BW-HVSP-COB/SMD-X-X-X-XXXXX

BW	HVSP	COB/SMD	-X	-X	-X	-XXXXX
COMPANY NAME	Product Info	Chip Type	Driver	Wattage	luminous side	
BSW	High Voltage Strip Light	COB OR SMD	ID: Internal driver OD: External driver	8:8W 12:12W 15:15W	Blank: Single-sided illumination DU: Double-sided illumination	Any number word or phrase

BULB BASE VAPORTIGHT

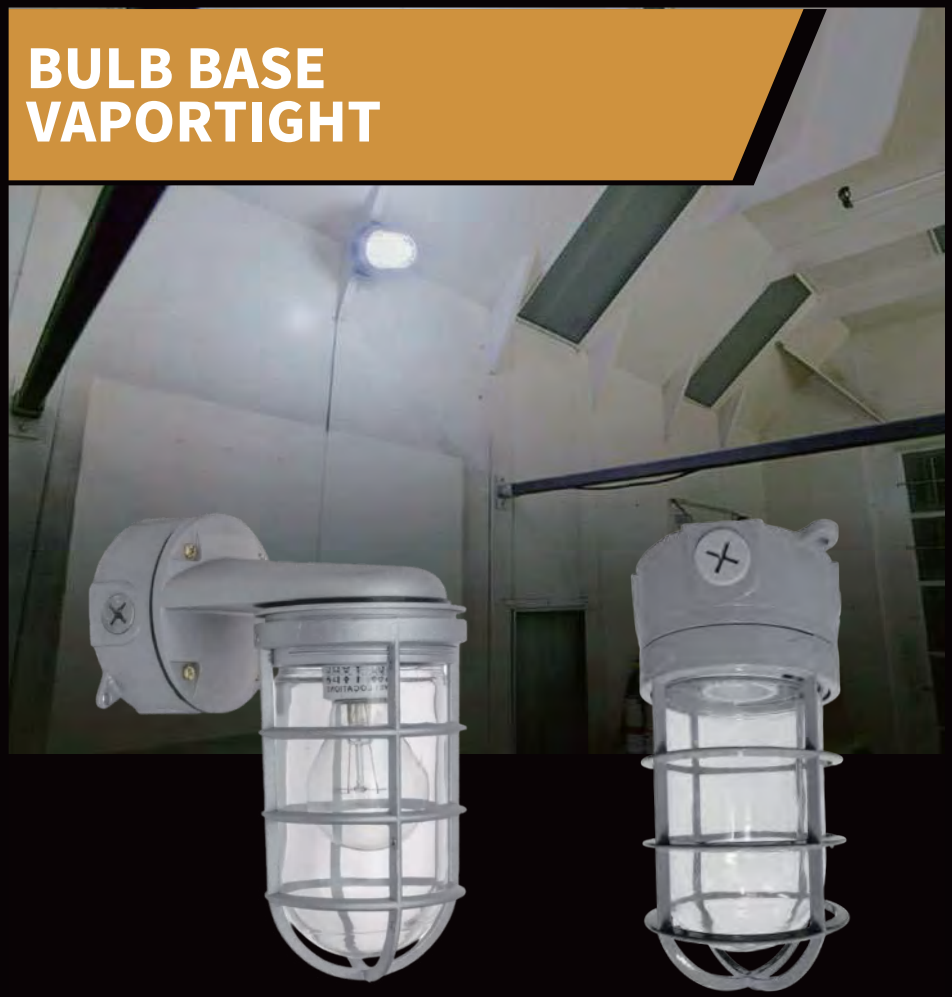

Wet Location

5 years warranty

Long Life 10 years OK


SPECIFICATIONS

ITEM#	INPUT VOLT.	LAMP BASE	INSTALLATION	MATERIAL	BULB
BWVT-C-XXX	AC 120V	E26/E27	CEILING	Aluminum +Glass	Not included
BWVT-W-XXX	AC 120V	E26/E27	WALL MOUNT	Aluminum +Glass	Not included

DIMENSIONS



Ceiling Mount

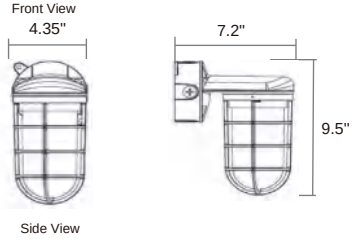

Wall Mount

APPLICATIONS





CATALOG NUMBER BREAKDOWN

BWVT-C-XXX/ BWVT-W-XXX

BW	VT	C/W	X
Company Name	Series	Mounting type	
Bestwon Lighting	Vapor Tight	Ceiling/ Wall mount	Any number Word or Phrase

TRIPOD WORK LIGHT
T3




SPECIFICATIONS

MODEL	LED	BATTERY PACK	MODE	BRIGHTNESS	ENDURANCE	PRODUCT SIZE	WEIGHT
T3-70-X	SMD	Milwaukee, BOSCH-PRO, Bosch-Green, MAKITA, DEWALT, FLEX	Low-High -off	2000LM-7000LM	9h-2.7h	190*145*440mm	2790g


STORAGE STATUS




EXPAND STATUS

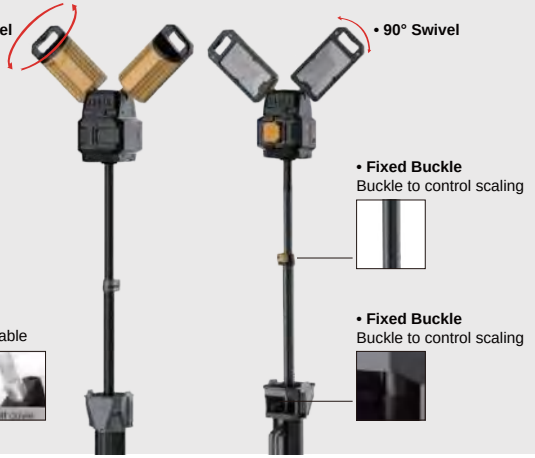

• **Fixator**
Matel, Removable



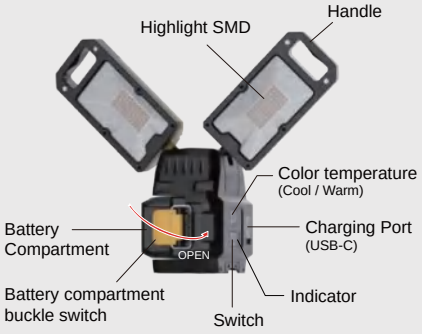

Tripod
Connection Hole

• The connection hole is replaceable and can be matched with different brands of tripod lights.



APPLICATION







TRIPOD WORK LIGHT
T2





SPECIFICATIONS

MODEL	LED	BATTERY	BRIGHTNESS	ENDURANCE	CHARGING TIME	CHARGER	SIZE TOTAL LENGTH	STORAGE SIZE	WEIGHT
T2-20-X	SMD	2x18650 3.7v 4000mAh lithium battery	700-1200-2000lm	8-3.5-2hrs	5hours	5V 2A, typeC charging port	142cm	80*8*6.65cm	1.85kg
T2-45-X	SMD	2x21700 7.3v 4000mAh lithium battery	1200-2500-4500lm	9-4.5-2h	5hours	5V 2A, typeC charging port	170cm	80*10*9.5cm	-



APPLICATION




TRIPOD WORK LIGHT
T1





SPECIFICATIONS

LED	BATTERY	MODE	BRIGHTNESS	ENDURANCE	CHARGING TIME	SIZE TOTAL LENGTH	STORAGE SIZE
Lumileds 2828	2x21700 7.3v 4000mAh	10%-30%-100%-off	500-1500-5000lm	5-2.5-1hrs	6hours	192cm	16x12x89cm

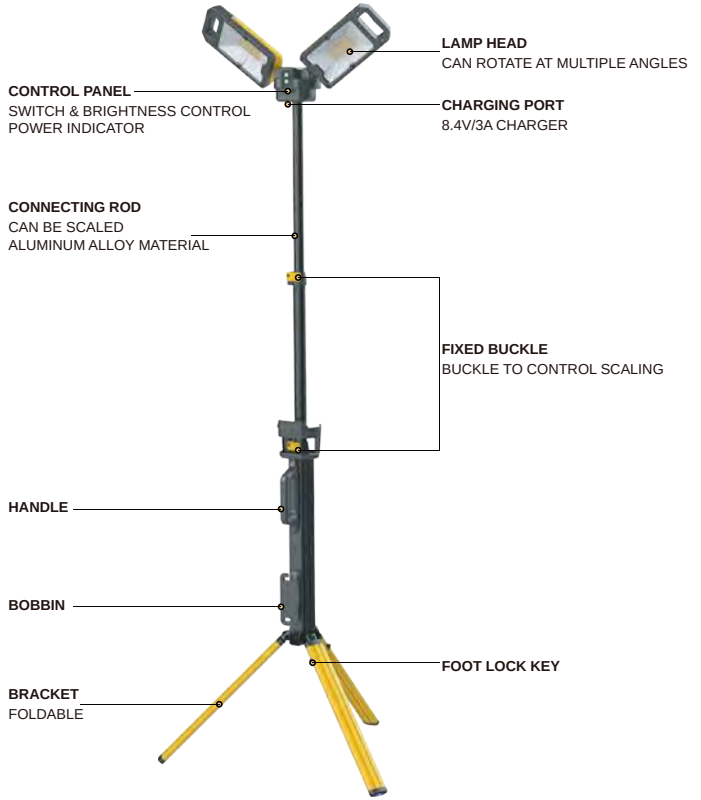

APPLICATION







NECK WORKLIGHT
N1



DESCRIPTION


LED	Battery	Modes	Light Output	Runtime	Charging Time	Size
SMD3535	2000mAh 103450 Battery	ON-OFF	150lm- single light, 300 lm- dual light	6.5 hrs/ 3.5 hrs	4 hrs	185x145x45mm











300LUMENS(DUAL)
150LUMENS(SINGLE)
2h(DUAL),4h(SINGLE)
2000mAh

LED	Mode	Charging time	Waterproof	Battery	Dimension	Weight
Osram LED	ON-OFF	4hrs	IPX4	3.7v 2000mAh	185x145x45mm	222g

®

277V 347V | 50,000h | CCT Tunable | DIM Dimmable | CRI80



Power&CCT Tunable UFO LED High Bay 001

Beam Angle



60°/90°/120°

Color temperature



3000K 4000K 5000K



Optional : Plug & Play microwave sensor



PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGUFO001JHT90150 -R-3C(3+5)-WL-DM	176*149.6*58	AC120-277V/ AC120-347V	3CCT	150W-120W-90W	>150LM/W	IP65
YGUFO001NHT120200 -R-3C(3+5)-WL-DM	241*184*72	AC120-277V/ AC120-347V	3CCT	200W-150W-120W	>150LM/W	IP65
YGUFO001MHT150240 -R-3C(3+5)-WL-DM	301*229*92.5	AC120-277V/ AC120-347V	3CCT	240W-200W-150W	>150LM/W	IP65

®

277V 347V | 50,000h | CCT Tunable | DIM Dimmable | CRI80




Outdoor 5CCT LED Wall Light-V1

Beam Angle



90°

Color temperature



2700K 3000K 3500K 4000K 5000K



Photocell

PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Shape	Lumens	IP Rated
YGWL001FD12 -R-5C（2.7+5）	90*160MM	AC120-277V	5CCT	12W	Round（Single head）	>100LM/W	IP65
YGWL001HD15 -R/S-5C（2.7+5）	108*200MM	AC120-277V	5CCT	15W	Round/Square(Single head)	>100LM/W	IP65
YGWL001JD20 -R/S-5C（2.7+5）	90*260MM	AC120-277V	5CCT	20W	Round/Square(Double heads)	>100LM/W	IP65
YGWL001LE25 -R/S-5C（2.7+5）	108*300MM	AC120-277V	5CCT	25W	Round/Square(Double heads)	>100LM/W	IP65
YGWL001LD30 -S-5C（2.7+5）	120*300MM	AC120-277V	5CCT	30W	Square（Double heads）	>100LM/W	IP65
YGWL001JD20 -R-5C（2.7+5）	90*405MM	AC120-277V	5CCT	20W	Round(Double heads)	>60LM/W	IP65


®

120- 277V | 50,000h | Tunable | Dimmable | CRI80





Outdoor 5CCT LED Wall Light-V2



120°

Photocell



PRODUCT PARAMETERS

MODEL NO	Size	Input voltage	Color(CCT)	Watt	Dimmable	Lumens	IP Rated
YGWL002LET1218 -S-5C（2.7+5）-PC	310*126*85MM	AC120-277V	5CCT	12W-15W-18W	0-100%	>90LM/W	IP65
YGWL002LET2030 -S-5C（2.7+5）-PC	310*126*85MM	AC120-277V	5CCT	20W-24W-30W	0-100%	>90LM/W	IP65
YGWL002LET30-S-WIFI	310*126*85MM	AC120-277V	RGBCW	30W	0-100%	>90LM/W	IP65

®


120-277V 120-347V | 50,000h | Tunable | Dimmable | CRI80







Outdoor 5CCT LED Wall Light-V3



90°

Photocell

PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGWL003HH24 -S-5C（2.7+5）	203*203*60mm	AC120-277V	5CCT(2.7+5)	24W	>70LM/W	IP65

®

120-277V
120-347V
50,000h
Tunable
Dimmable
CRI80



Outdoor 5CCT LED Wall Light-V4

Beam Angle
90°

Color temperature
2700K 3000K 3500K 4000K 5000K

Photocell

PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGWL004KD20 -R-5CCT (2.7+5)	100*150*280mm	AC120-277V	5CCT(2.7+5)	20W	60LM/W	IP65

®

120-277V
120-347V
50,000h
Tunable
Dimmable
CRI80



LED Wall Pack

Beam Angle

Color temperature
3000K 4000K 5000K

PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGWL042NIT4060 -S-3C(3+5)-DM	360.8*235.5*185.7	AC120-277V/ AC120-347V	3CCT	60-50-40W	130LM/W	IP65
YGWL042NIT80120 -S-3C(3+5)-DM	360.8*235.5*185.7	AC120-277V/ AC120-347V	3CCT	120-100-80W	130LM/W	IP65


®







Adjustable LED Wall Pack



PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGWP002HFT2040 -S-3C(3+5)-BR	197.2*165.6*134.5	AC120-277V/ AC120-347V	3CCT	40W-30W-20W	150LM/W	IP65
YGWP002IHT4060 -S-3C(3+5)-BR	235.4*216.8*151.5	AC120-277V/ AC120-347V	3CCT	60W-50W-40W	150LM/W	IP65
YGWP002KJT6080 -S-3C(3+5)-BR	72.5*216.8*151.5	AC120-277V/ AC120-347V	3CCT	80W-70W-60W	150LM/W	IP65

®








Outdoor 3CCT LED Mini Wallpack





90°



Photocell




EVA foam

PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGWL007HE25-S -3C（3+5）-BK	210*140*81mm	AC120-277V AC120-347V	3CCT	25W	130LM/W	IP65


®



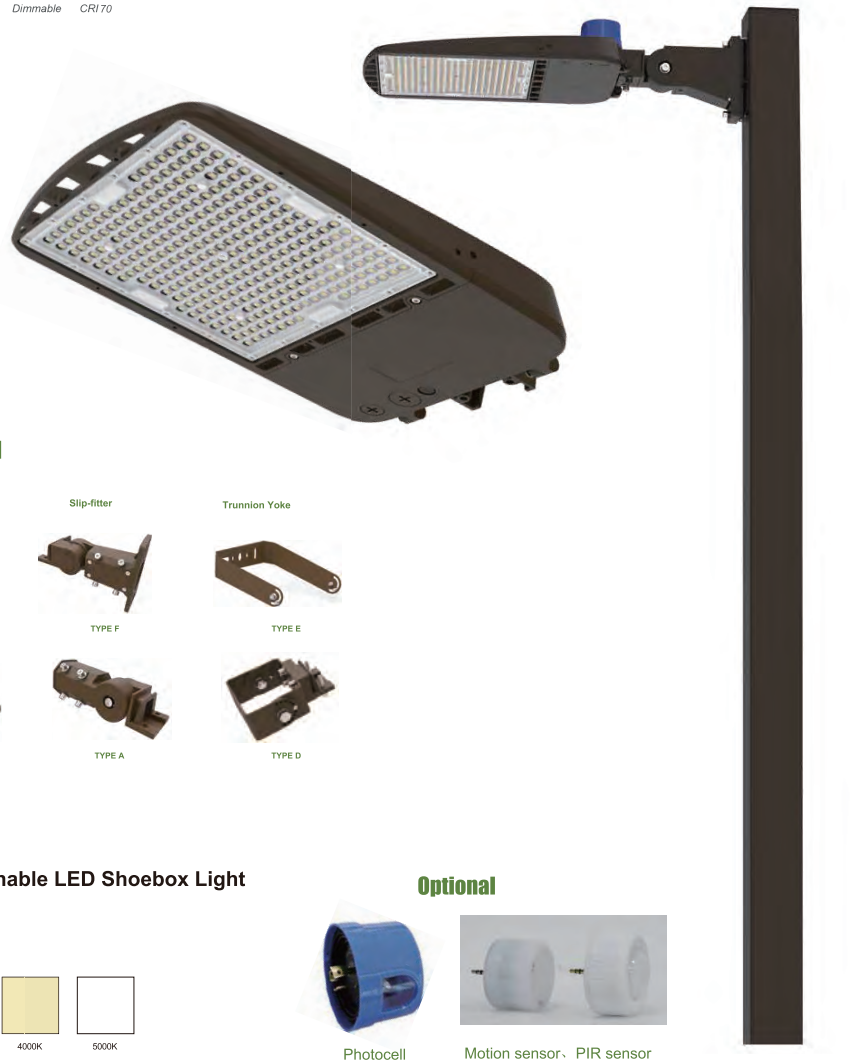

Bracket Optional

Power&CCT Tunable LED Shoebox Light



Optional

PRODUCT PARAMETERS


MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGST001PJT90150 -S-3C(3+5)-BR	412*250*60.2	AC120-277V/ AC120-347V	3CCT	150W-120W-90W	150LM/W	IP65
YGST001SKT150240 -S-3C(3+5)-BR	473.2*279.7*60.5	AC120-277V/ AC120-347V	3CCT	240W-200W-150W	150LM/W	IP65
YGST001UMT180300 -S-3C(3+5)-BR	536.9*338*60.2	AC120-277V/ AC120-347V	3CCT	300W-240W-180W	150LM/W	IP65

®





Power&CCT Tunable LED Flood Light with PC Lens



PRODUCT PARAMETERS


MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGFL001GDT1030 -S-3C(3+5)-BR	192.42*107.51*57.5	AC120-277V/ AC120-347V	3CCT	30W-20W-10W	130LM/W/150LM/W	IP65
YGFL001IET3050 -S-3C(3+5)-BR	228.43*130.93*61.53	AC120-277V/ AC120-347V	3CCT	50W-40W-30W	130LM/W/150LM/W	IP65
YGFL001LGT60100 -S-3C(3+5)-BR	310.58*173.75*76	AC120-277V/ AC120-347V	3CCT	100W-80W-60W	130LM/W/150LM/W	IP65

®





Power&CCT Tunable LED Flood Light with Glass Lens




PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGFL002IGT4080 -S-3C(3+5)-BR	241.1*184.1*72.2	AC120-277V/ AC120-347V	3CCT	80W-60W-40W	130LM/W/150LM/W	IP65
YGFL002LIT90150 -S-3C(3+5)-BR	301.1*229.3*92.5	AC120-277V/ AC120-347V	3CCT	150W-120W-90W	130LM/W/150LM/W	IP65

®








Optional : Plug & Play Sensor

Power&CCT Tunable LED Canopy Light



PRODUCT PARAMETERS


MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGCP001JJT4080 -S-3C(3+5)-BR	255.6*255.6*69.3	AC120-277V/ AC120-347V	3CCT	80W-60W-40W	130LM/W;150LM/W	IP65
YGCP001JJT70120 -S-3C(3+5)-BR	255.6*255.6*69.3	AC120-277V/ AC120-347V	3CCT	120W-90W-70W	130LM/W;150LM/W	IP65

®





Die-cast Aluminum Power&CCT Tunable LED Linear High Bay-001






PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGLHB001NJT80150 -S-3C(3.5+5)-WH	360*260*55.8	AC120-277V/ AC120-347V	3CCT	80W-120W-150W	135LM/W/150LM/W	IP44
YGLHB001RKT160240 -S-3C(3.5+5)-WH	412*250*60.9	AC120-277V/ AC120-347V	3CCT	160W-200W-240W	135LM/W/150LM/W	IP44
YGLHB001WKT220300 -S-3C(3.5+5)-WH	585*285*54	AC120-277V/ AC120-347V	3CCT	220W-260W-300W	135LM/W/150LM/W	IP44

®



Sheet Metal Power&CCT Tunable LED Linear High Bay-002





PRODUCT PARAMETERS

MODEL NO	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGLHB002XKT80160 -S-3C(3.5+5)-WH	620*280*50	AC120-277V/ AC120-347V	3CCT	160W-120W-80W	135LM/W/150LM/W	IP44
YGLHB002cKT160240 -S-3C(3.5+5)-WH	920*280*50	AC120-277V/ AC120-347V	3CCT	240W-200W-160W	135LM/W/150LM/W	IP44
YGLHB002cKT220300 -S-3C(3.5+5)-WH	920*280*50	AC120-277V/ AC120-347V	3CCT	300W-260W-220W	135LM/W/150LM/W	IP44
YGLHB002dKT300400 -S-3C(3.5+5)-WH	1120*280*50	AC120-277V/ AC120-347V	3CCT	400W-350W-300W	135LM/W/150LM/W	IP44

®

50,000h Tunable Dimmable CRI 80



Power&CCT Tunable LED Linear Strip Light 001

Beam Angle

Color temperature

3500K 4000K 5000K





PRODUCT PARAMETERS

MODEL NO	Size(FT)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGSL001XCT1224 -S-3C(3.5+5)-WH	2FT	AC120-277V/ AC120-347V	3CCT	24W-18W-12W	135LM/W	IP44
YGSL001dCT2045 -S-3C(3.5+5)-WH	4FT	AC120-277V/ AC120-347V	3CCT	45W-30W-20W	135LM/W	IP44
YGSL001hCT5080 -S-3C(3.5+5)-WH	8FT	AC120-277V/ AC120-347V	3CCT	80W-65W-50W	135LM/W	IP44

®

50,000h Tunable Dimmable CRI 80





Snap Button



Screw



AC input line

Power&CCT Tunable LED Vapor Light 001

Beam Angle

Color temperature

3500K 4000K 5000K

PRODUCT PARAMETERS

MODEL NO	Size(FT)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGTP001XCT1224 -S-3C(3.5+5)-WH	2FT	AC120-277V/ AC120-347V	3CCT	24W-18W-12W	135LM/W	IP65
YGTP001dCT2040 -S-3C(3.5+5)-WH	4FT	AC120-277V/ AC120-347V	3CCT	40W-30W-20W	135LM/W	IP65
YGTP001hCT4060 -S-3C(3.5+5)-WH	8FT	AC120-277V/ AC120-347V	3CCT	60W-50W-40W	135LM/W	IP65

®








Microwave sensor | PIR sensor | Light sensor | Bluetooth optional | Remote Controller

Power&CCT Tunable Outdoor LED Barn Light



PRODUCT PARAMETERS

Model No	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGBL001LHT5090 -R-3C(3.5+5)-BK	299*192*88mm	AC120-277V/ AC120-347V	3CCT	90W-70W-50W	135LM/W; 150LM/W	IP65

®





LED POST TOP LIGHT



PRODUCT PARAMETERS


Model No	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGPT001SNT90150 -R-3C（3+5）-BK	488*360mm	AC120-277V AC120-347V	3CCT	150W/120W/90W	150LM/W	IP65

®

50,000h Dimmable CRI 70



LED BOLLARD LIGHT



PRODUCT PARAMETERS

Model No	Size(mm)	Input voltage	Color(CCT)	Watt	Lumens	IP Rated
YGBO001FcT1424-R-3C(3+)-BR-PC-A	L:1005.8*H:762 Ø162.9	AC120-277V AC120-347V	3CCT	24/19/14W	140LM/W	IP65
YGBO001FcT1424-R-3C(3+5)-BR-PC-B	L:1004.8*H:762 Ø162.9	AC120-277V AC120-347V	3CCT	24/19/14W	140LM/W	IP65